

# EasyFit Isolator

Need to service your system with no way to isolate?



**Simply clamp, cut, and isolate. Just EasyFit!**

- An essential tool for all plumbers and DIYers.
- Quickly installs onto pressurized hot or cold water lines.
- Made for 1/2", 3/4" and 1" imperial copper (K,L,M) and PEX.
- Eliminates the need for costly shutdowns.
- No need for costly, time-consuming freezing.



[sales@lyn-car.com](mailto:sales@lyn-car.com)

[www.waterlineproducts.com](http://www.waterlineproducts.com)  
[www.lyn-car.com](http://www.lyn-car.com)





# EasyFit Isolator

## EasyFit Isolator:

### The Quick-fit Plumbing Isolation Valve for Pressurized Pipe

#### When to use the EasyFit Isolator?

- As an emergency shut-off valve for leaking pipe-work
- As an emergency isolator where the stop-cock seized or is inaccessible
- To isolate a heating system component for maintenance
- To save time on cooling, drain down, refilling and returning to de-aerate
- Where freezing is required, “no need to freeze” use Aladdin EasyFit Isolator to save time **without any disruption to services**
- As a convenience device in multi-occupancy buildings (e.g. Hotels, shops, and HMOs) where water supply needs to be worked on **without inconveniencing other occupants**
- When isolation is required for any water feed hot or cold
- As a “Green” alternative, particularly to gas-freezing
- To allow isolation in areas of a building where none exist

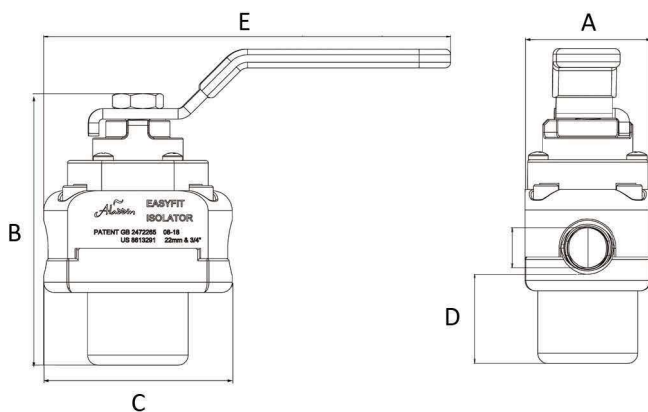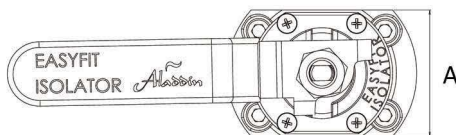

#### Dimensions

Part	1/2"	3/4"	1"
A	1.34"	1.97"	2.44"
B	3.31"	4.25"	5.04"
C	2.01"	2.95"	3.66"
D	0.94"	1.41"	1.77"
E	4.25"	6.38"	6.69"

#### Specifications

Max Operating Pressure	230 PSI
Max Operating Temperature	185 °F
Body	304 Stainless Steel
Secondary Seals	EPDM
Plug Assembly	High Tensile Brass with EPDM Boot
Cutting Blade	Steel

Installation Video

