


Toll Free Phone: 800.263.7011  
Toll Free Fax: 800.459.6227

Toll Free Phone: 800.361.3773  
Fax: 905.625.9481

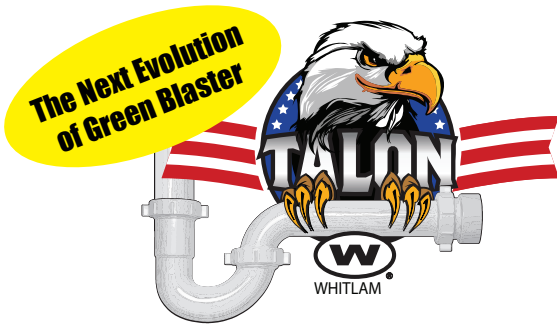

# TALON DRAIN OPENER

#### RECOMMENDED USES:

Drains  
Grease Traps  
Septic Systems  
Root Control

#### USAGE:

Talon Drain Opener is a dry, flake drain opener for clearing grease, hair and other organic matter from drains. Also can be used to control root growth.

#### COLOR/CONSISTANCY:

White Flake

#### APPLICATION PRECAUTIONS:

Talon Drain Opener is for professional use only. Read entire product information and instructions on reverse side before using.

#### AVAILABLE SIZES:

Stock #	Size	Items/ Case
TDC1	1 lb. (454 g)	24
TDC2	2 lbs. (907 g)	12

- Works in Less than 60 Sec
- Destroys Hair and Grease Instantly
- Will not Harm Chrome, Polished Brass or Plastic
- Safe for Septic Systems
- Non-Acid Opener



Talon Drain Opener is specifically formulated for use by Professional Plumbing Maintenance Personnel working in hotels, restaurants, apartment and condominium complexes, nursing homes and schools. Talon Drain Opener opens drains clogged by grease, hair and other organic matter, controls root growth, and opens grease traps fast without the dangers associated with acid type drain openers. Talon Drain Opener can be used monthly as preventive maintenance to keep drains clear and flowing smoothly.

TDC1	1 lb. - 454 g	Plastic Container*	24	33 lbs. - 15.0 kg
TDC2	2 lb. - 907 g	Plastic Container*	12	16 lbs. - 7.3 kg

\*Childproof Caps



LynCar  
Tel: 800.263.7011  
Email: sales@lyn-car.com

For Professional Use Only - Not For Retail Sale  
ONLY FOR USE BY PLUMBING PROFESSIONALS AND TRAINED MAINTENANCE PERSONNEL.



**DIRECTIONS FOR USE**  
**READ DIRECTIONS BEFORE USING**

**DRAINS:** Run hot water to warm lines. Add 1 cup **TALON DRAIN OPENER** slowly and directly into drain opening. Run just enough hot tap water to dissolve all the **TALON DRAIN OPENER**. Do not use boiling water with this product. Let stand for one minute, flush with more hot tap water. To prevent drains from clogging in the future, add ½ to 1 cup of **TALON DRAIN OPENER** once a month. If drain is totally clogged, open drain with a snake to allow at least slight flow, then add **TALON DRAIN OPENER** as directed above.

**GREASE TRAPS:** Use 2 pounds of **TALON DRAIN OPENER** for every 100 gallon capacity of the grease trap to keep grease traps working properly. Pour in **TALON DRAIN OPENER** slowly, then add hot tap water until it is completely dissolved. Let sit overnight for best results.

**TOILET BOWLS AND CHINA FIXTURES:**

Follow directions under "DRAINS", but premix each ½ cup **TALON DRAIN OPENER** with 2 cups of cold water before adding to drain. Add **TALON DRAIN OPENER** slowly to the 2 cups of water and stir constantly to avoid a violent exothermic reaction.

**SEPTIC SYSTEMS:** Use 6 pounds of **TALON DRAIN OPENER** to treat a 500 gallon capacity septic tank. Pour **TALON DRAIN OPENER** along with very hot water down sink or tub drain, run hot water for a minute after all **TALON DRAIN OPENER** is down the drain. Add 6 pounds of **TALON DRAIN OPENER** once per year to help prevent the build up of grease and solid waste in system.

**ROOT CONTROL:** Add 2 pounds slowly to any drain leading to a root clogged drain. Let water run in drain until **TALON DRAIN OPENER** reaches roots. Let sit overnight then flush with hot tap water. Use monthly to control roots.

**APPLICATION PRECAUTIONS**

- **READ ENTIRE PRODUCT LABEL AND SAFETY DATA SHEET BEFORE USING PRODUCT.**
- **TALON DRAIN OPENER CONTAINS SODIUM HYDROXIDE.**
- **HIGHLY CORROSIVE. CAN CAUSE SEVERE BURNS AND/OR BLINDNESS.**
- **HARMFUL OR FATAL IF SWALLOWED.**
- **DO NOT MIX WITH ACIDS, BLEACH, ALKALINE OR OTHER CHEMICALS.**
- **KEEP AWAY FROM CHILDREN.**
- **ALWAYS WEAR RUBBER GLOVES AND GOGGLES OR FACE SHIELD WHEN HANDLING TALON DRAIN OPENER.**
- **DO NOT GET IN EYES, ON SKIN OR ON CLOTHING.**
- **DO NOT USE IN DISPOSALS OR MIX IN AN ALUMINUM CONTAINER.**
- **DO NOT USE IF ACIDS OR OTHER CHEMICALS ARE IN THE SYSTEM.**
- **KEEP CONTAINER CLOSED AND TIGHTLY CAPPED WHEN NOT IN USE.**
- **AFTER HANDLING TALON DRAIN OPENER, WASH THOROUGHLY, INCLUDING CONTAMINATED EQUIPMENT, SHOES AND CLOTHING .**
- **NEUTRALIZE IRRITATED SKIN WITH VINEGAR.**
- **WHEN USING, PROVIDE SUFFICIENT VENTILATION TO PREVENT BUILDUP OF VAPORS OR MIST.**
- **STORE IN A COOL DRY AREA OUT OF REACH OF CHILDREN.**
- **DO NOT DROP.**
- **AVOID SPILLS. THIS PRODUCT WILL ATTACK ALL ORGANIC MATERIAL.**
- **USE ORIGINAL CONTAINER ONLY. DO NOT TRANSFER.**
- **FOR SALE, USE, AND STORAGE BY PROFESSIONALS ONLY ! NOT FOR CONSUMER USE.**

