


FR-QR

Commercial Upright,
Pendent, Recessed
Pendent, HSW, and
Recessed HSW Sprinkler

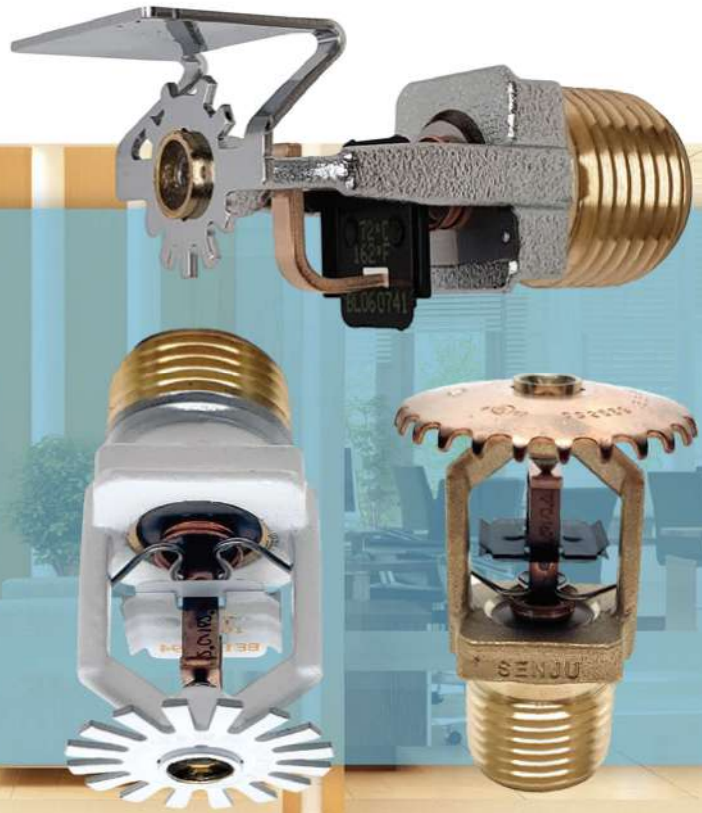

SIN

SS2551 (Pendent)
SS2552 (Upright)
SS2553 (Horizontal Sidewall)

K-Factor

5.6 (80.6)

Temperature Ratings

162°F (72°C), 205°F (96°C),
286°F (141°C)

Heat Responsive Element

Fusible Link

Response Type

Quick Response

Coverage Area

Standard Coverage

Maximum Working Pressure

175 psi (12.1 bar)

Thread Size

1/2" NPT

Vertical Adjustment

1/2 inch (12.7 mm) with D1 2pc Escutcheon
3/4 inch (19.1 mm) with D2 2pc Escutcheon

Finishes

White, Chrome, Black, Brass

Wrench

FR-H (Socket type) for Recessed Pendent
FR-H II (Socket type) for Recessed Pendent & HSW
FR-S (Spanner type) for Pendent & Upright & HSW

Accessories

Paint Protective Cap



FR-H



FR-H II



FR-S



Irvine office

30 Muller, Suite 112 Irvine, CA 92618
info@senjusprinkler.com

Dallas office

935 S. Kimball Ave., Suite 169 Southlake, TX 76092
dallas@senjusprinkler.com

SIN	TYPE	TEMPERATURE	ESCUTCHEON
SS2551 	Pendent	162°F (72°C)	-
		205°F (96°C)	-
		286°F (141°C)	-
	1/2 inch (12.7 mm) Recessed Pendent	162°F (72°C)	D1, 1/2 inch (12.7 mm) Adjustment
		205°F (96°C)	D1, 1/2 inch (12.7 mm) Adjustment
		286°F (141°C)	D1, 1/2 inch (12.7 mm) Adjustment*
	3/4 inch (19.1 mm) Recessed Pendent	162°F (72°C)	D2, 3/4 inch (19.1 mm) Adjustment
		205°F (96°C)	D2, 3/4 inch (19.1 mm) Adjustment
		286°F (141°C)	D2, 3/4 inch (19.1 mm) Adjustment
SS2552 	Upright	162°F (72°C)	-
		205°F (96°C)	-
		286°F (141°C)	-
SS2553 	Horizontal Sidewall	162°F (72°C)	-
		205°F (96°C)	-
		286°F (141°C)	-
	1/2 inch (12.7 mm) Recessed Horizontal Sidewall	162°F (72°C)	D1, 1/2 inch (12.7 mm) Adjustment
		205°F (96°C)	D1, 1/2 inch (12.7 mm) Adjustment
		286°F (141°C)	D1, 1/2 inch (12.7 mm) Adjustment*
	3/4 inch (19.1 mm) Recessed Horizontal Sidewall	162°F (72°C)	D2, 3/4 inch (19.1 mm) Adjustment
		205°F (96°C)	D2, 3/4 inch (19.1 mm) Adjustment
		286°F (141°C)	D2, 3/4 inch (19.1 mm) Adjustment

UL Approval

UL and FM Approval

*Due to FM Approval Standard 3.2.13 by Class Number 2000, use in combination with a sprinkler head rated higher than 255°F is not approved by FM.



Irvine office
 30 Muller, Suite 112
 Irvine, CA 92618
 info@senjusprinkler.com

Dallas office
 935 S. Kimball Ave., Suite 169
 Southlake, TX 76092
 dallas@senjusprinkler.com

SENJU SPRINKLER
www.SenjuSprinkler.com

(949) 333-1281

