

SWIVEL RING HANGERS

A-FIG 1091 Pre-Galv

A-FIG 4135

SS


SWIVEL RING HANGER

FUNCTION: Designed for the suspension of non-insulated stationary pipe lines. The knurled insert nut allows a vertical adjustment after installation.

CERTIFICATIONS: Complies with Manufactures' Standardization Society (MSS) SP-58 & SP-69 (Type 10). Complies with Federal Specifications A A-1192A (Type 10). Complies with Underwriters' Laboratories (UL) & (cUL) (EX16266, 41), 3/4" – 8" UL & cUL approved, Factory Mutual (FM) approved. (EX15150, PH702) shanghai vision mechanical, (EX15800, LXRH), zhejiang lianxiang hardware

MATERIAL: Available in Carbon Steel with zinc plated Insert Nut, and Stainless Steel with Stainless Steel Insert Nut

FINISH: Available in Pre-Galvanized and Stainless Steel

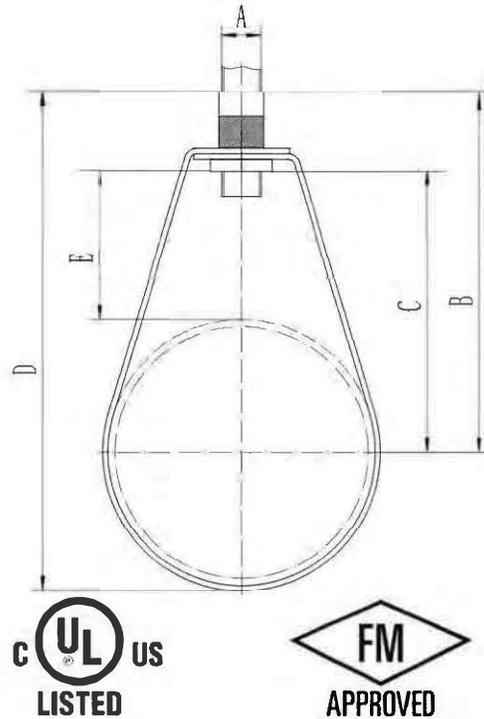

Iron Pipe Size	Specification Data					Rec. Max. Load (lbs.)	Approx. Wt. Per 100 (lbs.)
	A	B	C	D	E		
1/2	3/8	2 15/16	1 7/8	3 3/8	1 7/16	400	9.0
3/4	3/8	2 7/8	1 7/8	3 3/8	1 11/32	400	9.0
1	3/8	2 7/8	1 7/8	3 1/2	1 7/32	400	9.4
1 1/4	3/8	3 1/16	1 15/16	3 7/8	1 1/8	400	10.0
1 1/2	3/8	3 3/16	2 1/8	4 1/8	1 3/16	400	10.6
2	3/8	3 7/16	2 7/16	4 5/8	1 1/4	400	11.8
2 1/2	3/8	3 13/16	2 3/4	5 3/8	1 3/8	600	28.6
3	3/8	4	3	6 1/8	1 1/4	600	25.4
4	3/8	4 3/4	3 3/4	7	1 1/2	1000	38.0
5	1/2	6	4 3/4	8 3/4	1 15/16	1000	73.6
6	1/2	6 9/16	5 1/4	9 7/8	1 15/16	1250	82.5
8	1/2	7 13/16	6 5/8	12 3/8	2 5/16	1250	101.0

This specification sheet is for reference only. Aimco International Group Corp. reserves the right to make changes to the design without prior notice.