

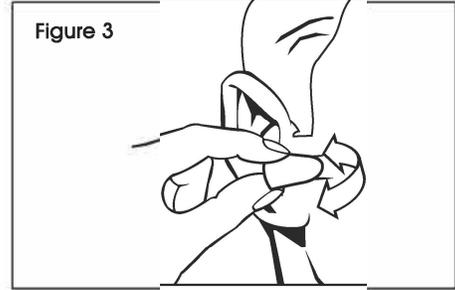


**FITTING INSTRUCTIONS**

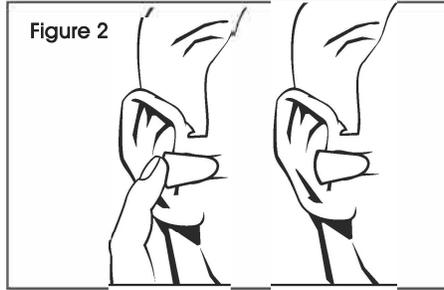

**WARNING!** The earplug must be properly worn to provide effective protection.

1. Roll to a small, crease-free cylinder. (See Figure 1)
2. Insert into the ear canal and hold until plug expands. (See Figure 2)
3. Remove the earplug slowly with a twisting motion to gradually break the seal. (See Figure 3)

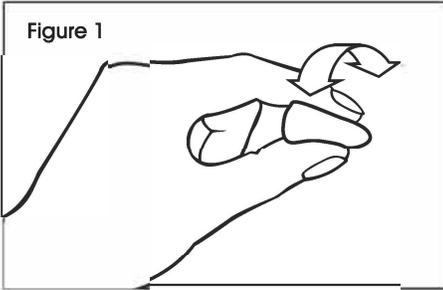

**NOTE:** This earplug model has satisfied the optional requirements at -4°F.

**ATTENUATION DATA**

FREQUENCY (Hz)	125	250	500	1,000	2,000	3,150	4,000	6,300	8,000	NRR
MEAN ATTENUATION (dB)	37.3	40.8	43.1	41.6	40.7	45.6	46.2	49.4	48.3	32 dB
STANDARD DEVIATION (dB)	5.9	5.3	5.0	4.8	2.8	4.2	4.2	4.4	4.5	

Tested according to ANSI Specs S3.19-1974 by Michael and Assoc., State College, PA.

**RECOMMENDATIONS**

It is recommended that the wearer ensure that:

- The earplugs are fitted, adjusted and maintained in accordance with the instructions.
- The earplugs are worn at all times in noisy surroundings.
- Before use, earplugs are stored in a cool, dry place.
- After use, earplugs should be disposed of, away from children.
- Keep earplugs away from small children.
- This product may be adversely affected by certain chemical substances. If necessary, further information should be sought from Uline.
- Corded earplugs should not be used where there is a risk that the connecting cord could be caught up during use.



**WARNING!** If recommendations are not adhered to, the protection afforded by the earplug will be severely impaired.